



PCT/GB00/02307

069245



INVESTOR IN PEOPLE

GB 090277

ETU

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

#3

REC'D 28 AUG 2000

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

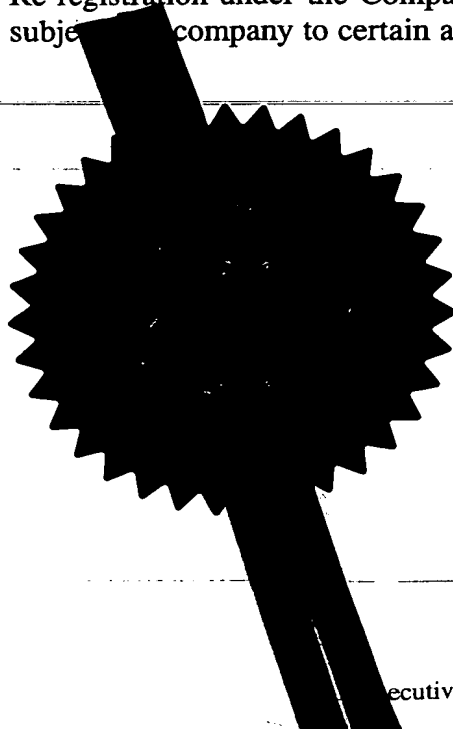

Signed

Evans

Dated 10 August 2000

THIS PAGE BLANK (USPTO)

For official

THE PATENT OFFICE

25 AUG 1999

25AUG99 E471927-1 003066
P01/7700 0.00 - 9920015.6

RECEIVED

Your reference

RMV/P95332

Notes

Please type, or write in dark ink using CAPITAL letters. A prescribed fee is payable for a request for grant of a patent. For details, please contact the Patent Office (telephone 071-438 4700).

Rule 16 of the Patents Rules 1990 is the main rule governing the completion and filing of this form.

Do not give trading styles, for example, 'Trading as XYZ company', nationality or former names, for example, 'formerly (known as) ABC Ltd' as these are not required.

Naming

After an application for a Patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977 and will inform the applicant if such prohibition or restriction is necessary. Applicants resident in the United Kingdom are also reminded that under Section 23, applications may not be filed abroad without written permission unless an application has been filed not less than 6 weeks previously in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction revoked.

The
Patent
Office

Request for grant of a Patent Form 1/77

Patents Act 1977

1 Title of invention

- 1 Please give the title of the invention

AUTOMATIC INSTALLATION PROCESS
FOR WIRELESS COMMUNICATION
SYSTEM

2 Applicant's details

- ☐ First or only applicant

- 2a If you are applying as a corporate body please give:

Corporate name
CEDARDELL LIMITED

Country (and State of incorporation, if appropriate)

ENGLAND

9920015.6

- 2b If you are applying as an individual or one of a partnership please give in full:

Surname

Forenames

- 2c In all cases, please give the following details:

Address
WARDEN'S END
LOW WARDEN
HEXHAM
NORTHUMBERLAND

UK postcode NE46 5SN
(if applicable)

Country UNITED KINGDOM

ADP number
(if known)

05551387001

00

2d, 2e and 2f:
If there are further applicants
please provide details on a separate
sheet of paper.

☐ Second applicant (if any)

2d If you are applying as a corporate body please give:

Corporate name

Country (and State of incorporation, if appropriate)

2e If you are applying as an individual or one of a partnership please give in full:

Surname

Forenames

2f In all cases, please give the following details:

Address

UK postcode
(if applicable)

Country

ADP number
(if known)

3
An address for service in the United
Kingdom must be supplied.

Please mark correct box

3 Address for service details

3a Have you appointed an agent to deal with your application?

Yes ☒ No ☐ → go to 3b

↓
Please give details below

Agent's name

URQUHART-DYKES & LORD

Agent's address

ST NICHOLAS CHAMBERS

AMEN CORNER

NEWCASTLE UPON TYNE

Postcode NE1 1PE

Agent's ADP number 00001644019

3b:
If you have appointed an agent,
all correspondence concerning
our application will be sent to
the agent's United Kingdom
address.

3b If you have not appointed an agent please give a name and address in the United
Kingdom to which all correspondence will be sent:

Name

Address

Postcode
ADP number
(if known)

Daytime telephone
number (if available)

RMV/P95332

Please mark correct box

5 Are you claiming that this application be treated as having been filed on the date of filing of an earlier application?

Yes ☐ No ☒ ➡ *go to 6*



please give details below

☐ number of earlier application or patent number

filing date

(day month year)

☐ and the Section of the Patents Act 1977 under which you are claiming:

Please mark correct box

15(4)-(Divisional) ☐ 8(3) ☐ 12(6) ☐ 37(4) ☐

6 If you are declaring priority from previous application(s), please give:

Country of filing	Priority application number (if known)	Filing date (day, month, year)
-------------------	---	-----------------------------------

3
If you are declaring priority from a PCT Application please enter 'PCT' as the country and enter the country code (for example, GB) as part of the priority number.

give the date in all number
format, for example, 31/05/90 for 31
May 1990.

7

The answer must be 'No' if:
any applicant is not an inventor
there is an inventor who is not
an applicant, or
any applicant is a corporate
body.

8

Please supply duplicates of
claim(s), abstract, description
and drawing(s).

Please mark correct box(es)

9

You or your appointed agent
see Rule 90 of the Patents
Rules 1990) must sign this
request.

Please sign here →

A completed fee sheet should
preferably accompany the fee.

7 Inventorship

7 Are you (the applicant or applicants) the sole inventor or the joint inventors?

Please mark the correct box

Yes ☐ No ☒ →

A statement of Inventorship on Patents Form
7/77 will need to be filed (see Rule 15).

8 Checklist

8a Please fill in the number of sheets for each of the following types of
document contained in this application.

Continuation sheets for this Patents Form 1/77

Claim(s)

Description

Abstract

Drawing(s)

8b Which of the following documents also accompanies the application?

Priority documents (please state how many)

Translation(s) of Priority documents (please state how many)

Patents Form 7/77 - Statement of Inventorship and Right
to Grant (please state how many)

Patents Form 9/77 - Preliminary Examination/Search

Patents Form 10/77 - Request for Substantive Examination

9 Request

I/We request the grant of a patent on the basis of this application.

Ugurbat - R. L. & L.

Signed

Date 24/08/1999

(day month year)

Please return the completed form, attachments and duplicates where
requested, together with the prescribed fee to:

☐ The Comptroller
The Patent Office
Cardiff Road
NEWPORT
Gwent
NP9 1RH

The Comptroller
The Patent Office
25 Southampton Buildings
London
WC2A 1AY

AUTOMATIC INSTALLATION PROCESS FOR WIRELESS COMMUNICATION SYSTEM

The present invention relates to a method of inserting communications modules into a wireless communication system having at least one control module and a plurality of communications modules, wherein the system transmits wireless either directly or indirectly between pairs of said modules. The invention relates particularly, but not exclusively, to a method of inserting communications modules into a system in which a high degree of reliability is required, such as in a security or fire alarm system.

Wireless communications systems are known in which one or more control modules transmit wireless messages around the system, either directly or indirectly, via successive radio frequency communications modules, each of which is designed to receive a message and transmit the message onwards in the system and is allocated a predetermined position in the order of message transmission. This enables wireless messages to be relayed across relatively large distances without the need for high powered transmitters, which in certain countries are subject to fairly stringent licensing requirements.

Known communications systems of this type suffer from the drawback that if one of the communications modules is moved, reliability of signal transmission paths around the system can no longer be relied upon, or the communications modules must be re-configured, which is a considerably time consuming process. Also, if a new communications module is inserted into the system, it is a fairly laborious process to re-configure the other units in the system (i.e. re-allocate their positions in the order of message transmission) in order to take account of the new unit. In particular, in broadcast systems it is usually necessary to program into the new unit system numbers, unit numbers, type identifiers and so on. The programming of

these parameters is relatively difficult for untrained personnel, thus increasing the cost and difficulty of operating the system. These numbers are sometimes inserted by means of software, but most often by means of a series of switches (of which there are usually 8 or 16), each of which needs to be set in one of two positions by personnel. This clearly makes setting up the system more labour intensive and therefore increases its cost.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

According to an aspect of the present invention there is provided a method of inserting a communications module into a wireless communication system comprising at least one control module and a plurality of communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules and each said module is adapted to receive a wireless message and transmit said message to a further communications module or to a said control module and is programmed with a respective address identifying modules with which it communicates messages directly when in a communication mode, the method comprising:

i) causing a said communications module to be inserted into the system to transmit a first signal in a set-up mode;
and

(ii) if said first signal is detected by at least one pair of modules, causing said module by means of a signal from at least one said control module to be installed to communicate directly with the two modules of at least one said pair in said communication mode.

This provides the advantage that the system can be automatically configured as each module is added to the system in such a way that reliability of communication links is

maximised. In addition, the advantage is provided that difficult procedures such as programming in system numbers and the like are avoided as this can be carried out automatically by the system of the invention.

In a preferred embodiment, the step of the step of causing said communications module to be inserted to communicate directly with the two modules of at least one said pair comprises updating the address of said modules adapted to transmit messages in the system subsequently to the communications module to be inserted.

In a preferred embodiment, said addresses are consecutively numbered, and said updating step comprises incrementing the numbers of the addresses of said modules adapted to transmit messages in the system subsequently to the communications module to be inserted.

The method may further comprise the step of testing reliability of communications links between said communications module to be inserted and the modules of said pair.

Said step of testing reliability preferably comprises exchanging at least one message between said communications module to be inserted and said modules of said pair.

According to another aspect of the invention, there is provided a method of method of automatically setting up a wireless communication system comprising at least one control module and a plurality of communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules and each said module is adapted to receive a wireless message and transmit said message to a further communications module or to a said control module and is programmed with a respective address identifying modules with which it communicates messages directly when in a communication mode, the method comprising:

- (i) causing a first communications module to transmit a first signal in a set-up mode;
- (ii) if said first signal is received by at least one said control module, causing said first communications module, by means of a second signal from a said control module which received said first message, to communicate in said communication mode directly with said control module which received said first message;
- (iii) causing a second communications module to transmit a third signal in a set-up mode;
- (iv) if said third signal is detected by said first communications module and said control module which received said first message, causing, by means of a fourth signal from said control module, said second communications module to communicate directly with the first communications module and said control module, and said first communications module to communicate directly with said second communications module, in said communication mode.

The method may further comprise the step of inserting at least one further communications module according to a method as defined above.

The method preferably further comprises the step of testing reliability of communications links between modules intended to communicate directly with each other.

The method may further comprise the step of changing the or each said communications module from said set-up mode to said communications mode by means of a signal from at least one said control module.

This provides the advantage of enabling the system to automatically make itself ready to communicate wireless messages when the communications modules have been inserted.

As an aid to understanding the invention, a preferred embodiment thereof will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawings, in which:-

Figure 1 shows a first step in a process embodying the present invention for introducing a first communications module into a wireless communication system;

Figure 2 shows a subsequent step to the step of Figure 1;

Figure 3 shows a subsequent step to the step of Figure 2;

Figure 4 shows a subsequent step to the step of Figure 3;

Figure 5 shows a first step in inserting a second communications module into the system of Figures 1 to 4;

Figure 6 shows a subsequent step to the step of Figure 5;

Figure 7 shows a subsequent step to the step of Figure 6;

Figure 8 shows a subsequent step to the step of Figure 7;

Figure 9 shows the communication system in which the master unit, first unit and second unit are inserted;

Figure 10 shows a first step in inserting a third communications module into the system of Figures 1 to 9;

Figure 11 shows a subsequent step to the step of Figure 10;

Figure 12 shows an alternative step to the step of Figure 11; and

Figure 13 shows a step in which the radio frequency communications links of the system of Figures 10 to 12 are tested.

Referring to Figure 1, a wireless communication system 1 such as a security system or fire alarm system initially comprises a master unit 2 comprising a control module, and a first communications module 3. The process of installing the communications module 3 in the system 1 is begun by switching the master unit 2 to its auto install mode. The first communications module 3 is then switched on, and the switching on of the communications module 3 automatically causes that module to go into its auto install mode. As a result, the first module 3 transmits a "Hello" message containing information identifying the first module 3.

If the master unit 2 receives the "Hello" signal from the first module 3, it responds with an "Ack" (acknowledgement) message, followed by an "init" (initialisation) message (Figure 2). The initialisation message initialises new communications modules (such as the first module 3) as they are installed in the system to give them a unique ID number reflecting their position in the system (i.e. the other modules in the system with which they exchange messages directly).

All communications modules in the system 1, and the master unit 2, have a unique ID number, but the master unit 2 has an additional ID number, i.e. the master unit 2 has ID numbers #0 and a further number equal to the number of communications modules in the system 1 plus 1. This reflects the fact that the master unit 2 is both the beginning and the end of the chain of communication in the system 1. In the arrangement shown in Figure 2, therefore, assuming that no other

communications modules 3 are already installed in the system 1, the first module 3 is initialised as ID #1.

As shown in Figure 3, the master unit 2 then tests the reliability of the communication link between itself and the first communication module 3 by repeatedly transmitting a radio frequency message to the first module 3, which is then transmitted back to the master unit 2. In order for the test to be successful, the message must be reliably exchanged a predetermined number of times, or the first module 3 is not installed. If the test is successful, on the other hand, the master unit 2 sends a configuration message (Figure 4) to the first module 3 to configure the function of the unit. If this process is successfully completed, the first module 3 is then installed and the master unit 2 can reliably transmit to and receive messages from the first module 3.

Referring to Figure 5, the second communications module 4 to be installed in the system 1 is then switched on, as a result of which it automatically enters its auto install mode and transmits a "Hello" message, in a manner similar to the first module 3. If the "Hello" message is received by the master unit 2 and the first module 3, the second module 4 is automatically installed in a manner similar to the first module 3 and is initialised with ID #1. This causes the master unit 2 to have ID #0 and ID #3, and the ID of the first module 3 is incremented to ID #2 (Figure 6).

The second module 4 is installed between the master unit 2 and the first module 3 as ID #1 because it is known to be able to communicate directly with these two neighbouring units. The reliability of the radio frequency communications links between the second module 4 and the master unit 2, and between the first module 3 and second module 4 is then tested (Figure 7). If this test is successfully carried out, the master unit 2 configures the second module 4 in a manner similar to the first module 3 as shown in Figure 8, and the system 1 is then as

shown in Figure 9 in which each of the master unit 2 and communications modules 3,4 can communicate directly with the other two. If, on the other hand, the second module 4 is out of radio range of either the master unit 2 or the first module 3, the "Hello" message is not detected by both the master unit 2 and first module 3, as a result of which the second module 4 is not installed.

Referring now to Figure 10, when a third module 5 to be installed is switched on, it transmits a "Hello" signal in a similar manner to the first 3 and second 4 modules. This "Hello" signal must be heard by two other units 2,3 or 4, or the third module 5 will not be installed. If the "Hello" message is received by the first and second modules 3,4 but not by the master unit 2, the third unit 5 is installed between those modules as ID #2, since it is known that the third module 5 can communicate directly with both of those modules. The master unit 2 and first module 3 then increment their ID numbers. The reliability of the radio frequency communication link between the third module 5 and the first and second modules 3,4 is then carried out, and the third module 5 configured if the test is successful.

Referring now to Figure 11, when a fourth module 6 to be installed is switched on (and therefore automatically enters its auto-install mode), it transmits a "Hello" message which must be received by at least two units having consecutive ID numbers (i.e. two units which can communicate directly with each other), otherwise it will not be installed. For example if the "Hello" message is received by the second module 4 (ID #1) and the first module 3 (ID #3) only, it will not be installed (Figure 11). If, on the other hand, the "Hello" message from the fourth module 6 is received by two units having consecutive ID numbers, it will be installed between these two units, as shown in Figure 12. If more than one pair of units having consecutive ID numbers detects the "Hello" message, the fourth module 6 is installed between the pair of

consecutively numbered units having the lowest ID numbers. For example, if the "Hello" message is received by the master unit 2 and the first 3 and second 4 communications modules, the fourth module 6 is installed between the master unit 2 and second unit 4 with ID #1.

When the fourth module 6 has been initialised with an ID number, the reliability of the radio frequency communication links to that module 6 is tested in the manner described earlier. When the module 6 has then been configured, it is successfully installed, and additional modules can then be installed in an analogous manner. The system 1 can revert to its communication mode.

It will be appreciated by persons skilled in the art that the above embodiment has been described by way of example only and not in any limitative sense, and that various alterations and modifications are possible without departure from the scope of the invention as defined by the appended claims.

CLAIMS

1. A method of inserting a communications module into a wireless communication system comprising at least one control module and a plurality of communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules and each said module is adapted to receive a wireless message and transmit said message to a further communications module or to a said control module and is programmed with a respective address identifying modules with which it communicates messages directly when in a communication mode, the method comprising:

i) causing a said communications module to be inserted into the system to transmit a first signal in a set-up mode; and

(ii) if said first signal is detected by at least one pair of modules, causing said module by means of a signal from at least one said control module to be installed to communicate directly with the two modules of at least one said pair in said communication mode.

2. A method according to claim 1, wherein the step of causing said communications module to be inserted to communicate directly with the two modules of at least one said pair comprises updating the address of said modules adapted to transmit messages in the system subsequently to the communications module to be inserted.

3. A method according to claim 2, wherein said addresses are consecutively numbered, and said updating step comprises incrementing the numbers of the addresses of said modules adapted to transmit messages in the system subsequently to the communications module to be inserted.

4. A method according to any one of the preceding claims,

further comprising the step of testing reliability of communications links between said communications module to be inserted and the modules of said pair.

5. A method according to claim 4, wherein the step of testing reliability preferably comprises exchanging at least one message between said communications module to be inserted and said modules of said pair.

6. A method of installing a communications module in a wireless communication system comprising at least one control module and a plurality of communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules and each said module is adapted to receive a wireless message and transmit said message to a further communications module or to a said control module and is programmed with a respective address identifying modules with which it communicates messages directly when in a communication mode, the method substantially as hereinbefore described with reference to the accompanying drawings.

7. A method of automatically setting up a wireless communication system comprising at least one control module and a plurality of communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules and each said module is adapted to receive a wireless message and transmit said message to a further communications module or to a said control module and is programmed with a respective address identifying modules with which it communicates messages directly when in a communication mode, the method comprising:

- (i) causing a first communications module to transmit a first signal in a set-up mode;
- (ii) if said first signal is received by at least one said

control module, causing said first communications module, by means of a second signal from a said control module which received said first message, to communicate in said communication mode directly with said control module which received said first message;

(iii) causing a second communications module to transmit a third signal in a set-up mode;

(iv) if said third signal is detected by said first communications module and said control module which received said first message, causing, by means of a fourth signal from said control module, said second communications module to communicate directly with the first communications module and said control module, and said first communications module to communicate directly with said second communications module, in said communication mode.

8. A method according to claim 7, further comprising the step of inserting at least one further communications module by means of a method according to any one of claims 1 to 6.

9. A method according to any one of the preceding claims, further comprising the step of testing reliability of communications links between modules intended to communicate directly with each other.

10. A method according to any one of the preceding claims, further comprising the step of changing the or each said communications module from said set-up mode to said communications mode by means of a signal from at least one said control module.

11. A method of automatically setting up a wireless communication system comprising at least one control module adapted to transmit wireless messages via a plurality of

communications modules, wherein each said communications module is adapted to receive a wireless message and transmit said message to a further communications module or to a said control module and is programmed with a respective address identifying modules with which it communicates messages directly when in a communication mode, the method substantially as hereinbefore described with reference to the accompanying drawings.

THIS PAGE BLANK (USPTO)

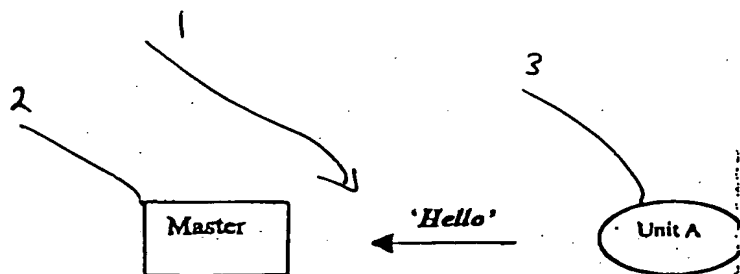


FIG. 1




FIG. 2



FIG. 3



FIG. 4

THIS PAGE BLANK (USPTO)

2/4

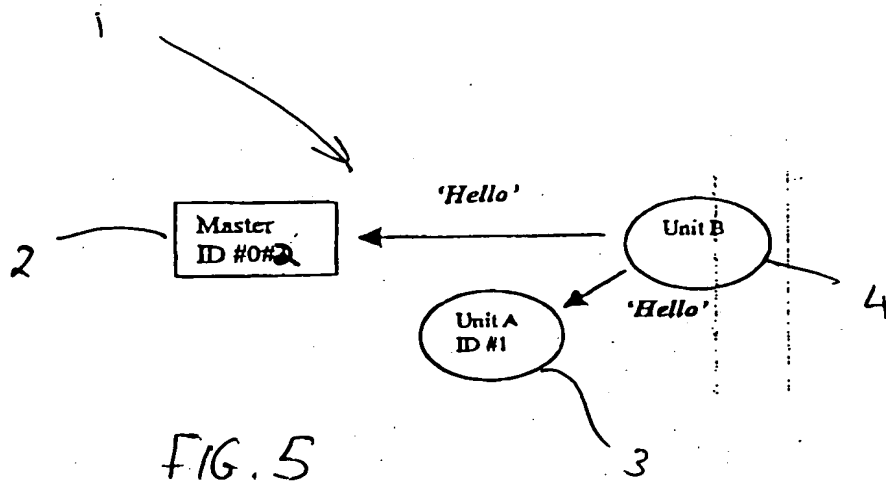


FIG. 5

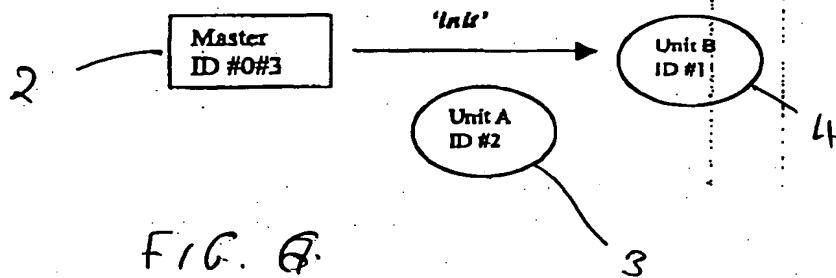


FIG. 6

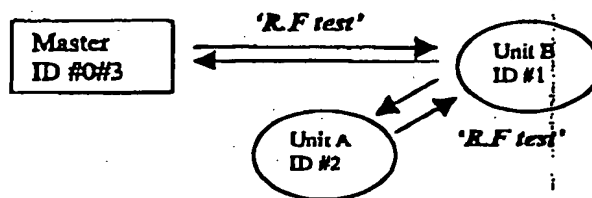


FIG. 7

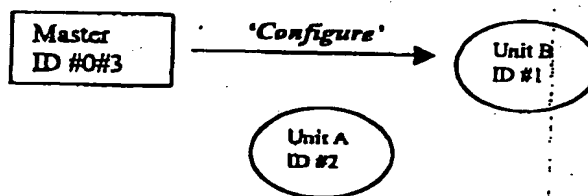


FIG. 8

THIS PAGE BLANK (USPTO)

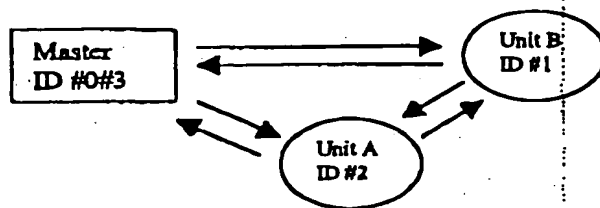


FIG. 9

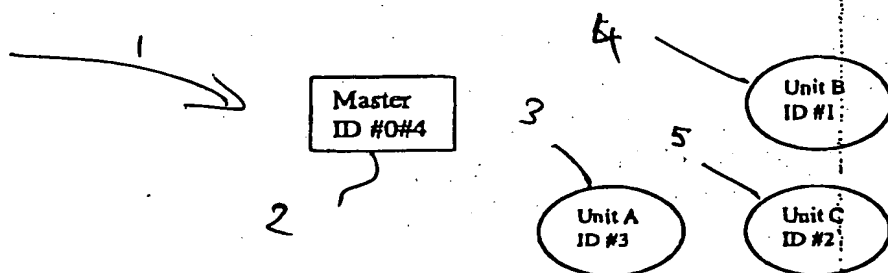


FIG. 10

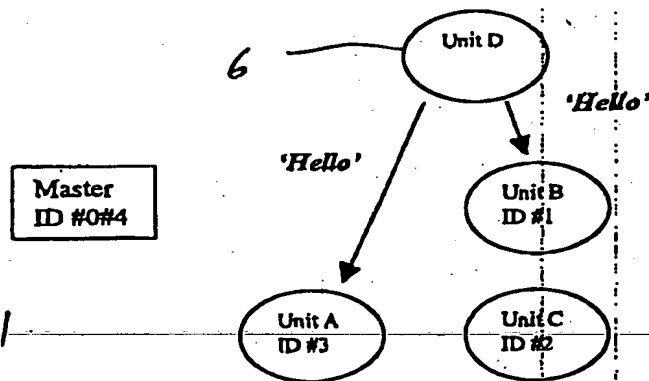


FIG. 11

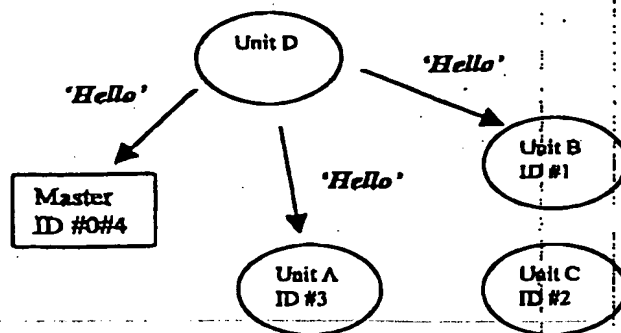


FIG. 12

THIS PAGE BLANK (USPTO)

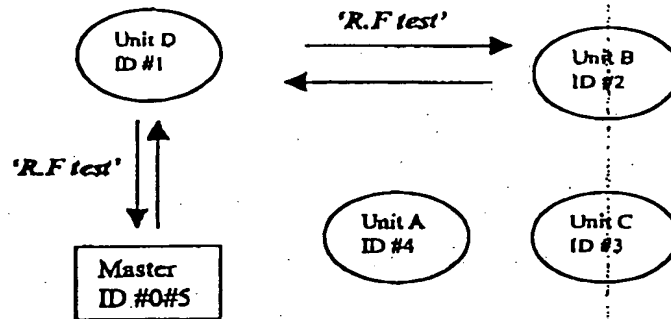


FIG. 13

pc 1000 d

THIS PAGE BLANK (USPTO)